


TEST PRESSURE

| | | | |
|-------------------|-------|---------------------|------|
| HYDRAULIC TEST | | Kgt/cm ² | MPa |
| | SHELL | 21.4 | 2.1 |
| | SEAT | 15.7 | 1.54 |

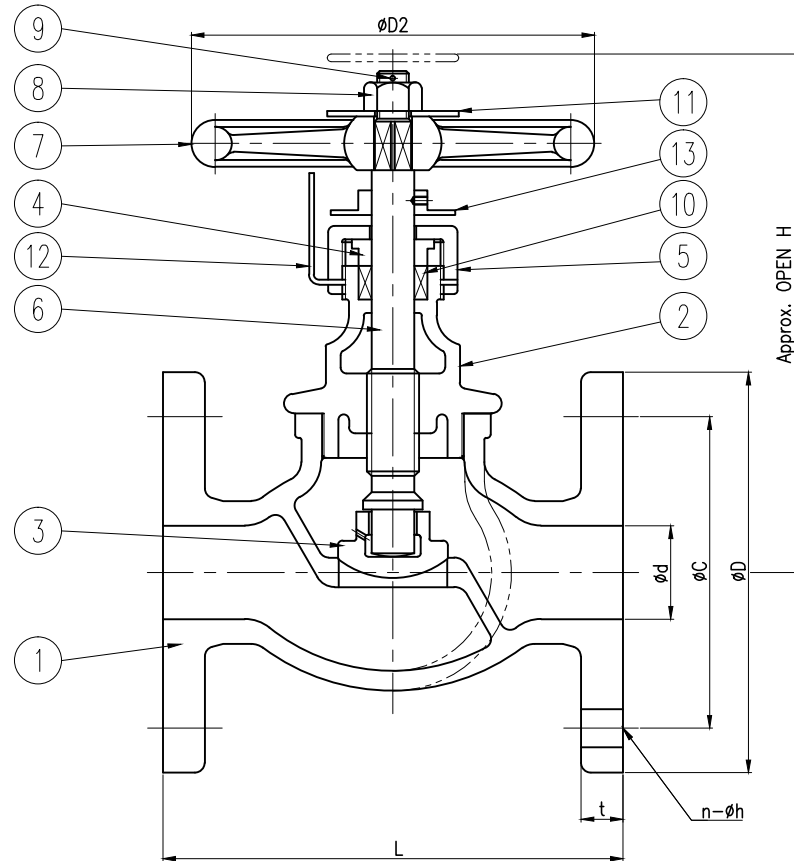

NOTES

- * Applicable Standard
- 1. Reference standard & Code : JIS B2026
- 2. Flange Dimension : AS2129 Table E
- 3. Flange Thickness : JIS F2240
- 4. Inspection & Test : JIS F7400

| 13 | INDICATOR | BC6/BRASS | | | |
|----------|-----------------|-----------------|----------|----------|----------|
| 12 | INDICATOR PLATE | BRASS | | | |
| 11 | NAME PLATE | AL/BRASS/SUS304 | | | |
| 10 | PACKING | PTFE/GRAPHITE | | | |
| 9 | SPLINT PIN | C2600 W | | | |
| 8 | HEXAGON NUT | C3771 BE/SUS304 | | | |
| 7 | HAND WHEEL | FC200 | | | |
| 6 | STEM | C3771 BE | | | |
| 5 | GLAND NUT | BC6/C3771 BE | | | |
| 4 | PACKING GLAND | C3771 BE | | | |
| 3 | DISC | BC6 | | | |
| 2 | BONNET | BC6 | | | |
| 1 | BODY | BC6 | | | |
| NO. | PART NAME | MATERIAL | REMARKS | | |
| △ | - | - | | | |
| △ | - | - | | | |
| △ | - | - | | | |
| REV. NO. | DATE | DESCRIPTION | DRW'D BY | CHK'D BY | APP'D BY |

[Unit : mm]

| NPS | BORE Ød | FLANGE | | | | | L | H | ØD2 |
|-----|------------|--------|----|----|---|----|-----|-----|-----|
| | | ØD | ØC | t | n | Øh | | | |
| 25A | 25 | 115 | 83 | 14 | 4 | 15 | 110 | 150 | 100 |
| 32A | 32 | 120 | 87 | 16 | 4 | 15 | 130 | 180 | 125 |
| 40A | 40 | 135 | 98 | 16 | 4 | 19 | 150 | 190 | 125 |

OKV OK KWANG Engineering Co., Ltd.