


TEST PRESSURE

HYDRAULIC TEST		Kgt/cm <sup>2</sup>	MPa
	SHELL	21.4	2.1
	SEAT	15.7	1.54

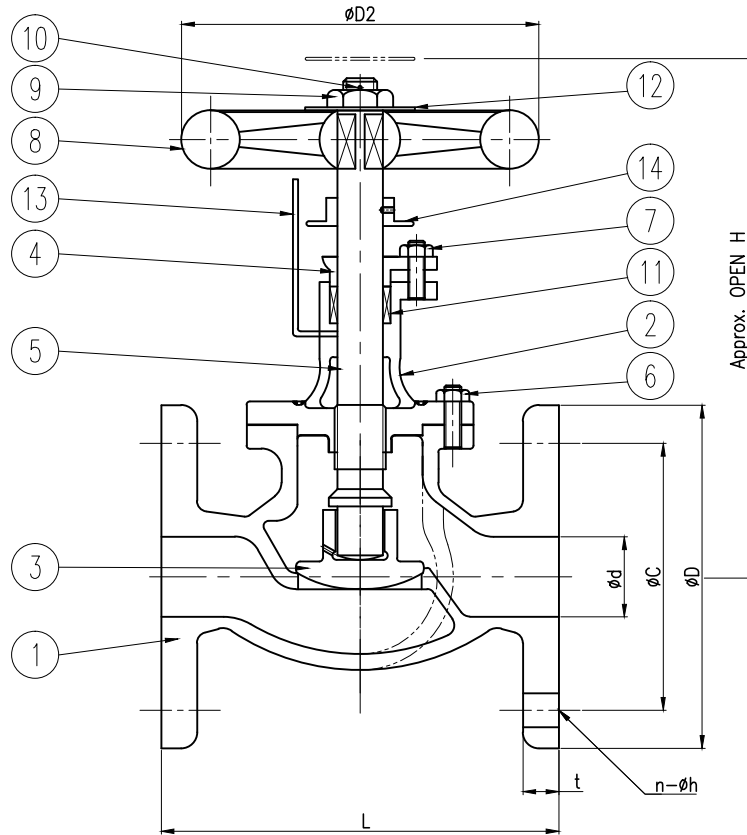

[ Unit : mm ]

NPS	BORE ød	FLANGE					L	H	øD2
		øD	øC	t	n	øh			
50A	50	150	114	16	4	18	180	255	140
65A	65	165	127	18	4	18	210	290	180
80A	80	185	146	18	4	18	240	305	200
100A	100	215	178	18	8	18	280	375	250

NOTES

- \* Applicable Standard
- 1. Reference standard & Code : JIS B2026
- 2. Flange Dimension : AS2129 Table E
- 3. Flange Thickness : JIS F2240
- 4. Inspection & Test : JIS F7400

14	INDICATOR	BC6/BRASS	
13	INDICATOR PLATE	BRASS	
12	NAME PLATE	AL/BRASS/SUS304	
11	PACKING	PTFE/GRAPHITE	
10	SPLINT PIN	C2600 W	
9	HEXAGON NUT	C3771 BE/SUS304	
8	HAND WHEEL	FC200	
7	GLAND BOLT/NUT	C3771 BE	
6	BODY BOLT/NUT	C3771 BE	
5	STEM	C3771 BE	
4	PACKING GLAND	C3771 BE	
3	DISC	BC6	
2	BONNET	BC6	
1	BODY	BC6	

NO.	PART NAME	MATERIAL	REMARKS
-----	-----------	----------	---------

△	-	-			
△	-	-			
△	-	-			

REV. NO.	DATE	DESCRIPTION	DRW'D BY	CHK'D BY	APP'D BY
----------	------	-------------	----------	----------	----------

TITLE	CAST BRONZE, GLOBE VALVE				
-------	--------------------------	--	--	--	--

RATING	10K	SIZE	50~80A	UNIT	mm
--------	-----	------	--------	------	----

DRW'D BY	CHK'D BY	APP'D BY	DATE	2017.03.23	SCALE	N/S
----------	----------	----------	------	------------	-------	-----

J.S.LIM	H.Y.JUNG	D.H.KIM	TYPE	Screwed Bonnet	
			DWG. NO.	NJGC-J202-AW53-00Jd	

**OKV OK KWANG Engineering Co., Ltd.**